


LYQA-POE-1601000

16CH-POE-10/100/1000MBPS

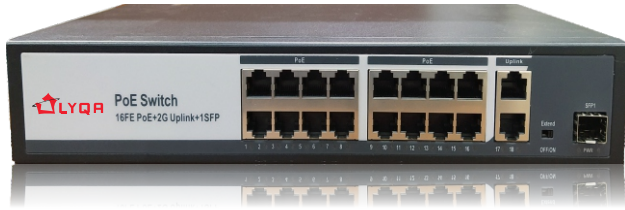

Main Feature:

- 16*10/100Mbps PoE ports
- 2*10/100/1000Mbps uplink port
- Support IEEE802.3af/at
- VLAN function
- Built-in power supply
- Maximum PoE power: 75W
- Power single port:30W
- distance up to 250m with
- Switching Capacity: 7.6Gbps
- Consumption: 120W(52V 2.3A)



Feature	Specification
Power Adapter Voltage	AC 110V-240V
Consumption	250W(52V 4.8A)
PoE Ethernet Port	1-16 port:10/100Mbps
Ethernet Port, SFP Port	Uplink port:10/100/1000Mbps, SFP Port: 1000Mbps
Transmission Distance	100Mbps:0-100m / 10Mbps:0-250m / Uplink Port:0-100m
Transmission Medium	Cat5/5e/6 standard network cable
Network Standard	IEEE802.3/802.3u,IEEE802.3x,IEEE802.3ab
Switching Capacity	7.6Gbps
Packet Buffer Memory	1Mbits
Throughput	5.6544Mbps
MAC Table	2K
Packet Forwarding rate	10Mbps:14880pps/port, 100Mbps:148800pps/port, 1000Mbps: 1488000pps/port
PoE Standard	IEEE802.3af/at
PoE Power Supply	End-Span(1/2 + ; 3/6 -)
PoE Power	af=15.4w,at=30w for each por
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and back pressure for Half-duplex mode
LED Indicator	LINK/ACT 100Mbps: PoE Status Indicator, Power Indicator, Extender
Working temperature	0 ~50
Relative Humidity	20-95%
Storage temperature	-20 ~70
Dimension(L*W*H)	440mm*285mm*55mm
Color & Weight	Black 4.2Kg

